



MECHANICAL ENGINEERING LAB

3rd Semester Electrical



PREPARED BY: KEDARNATH JENA
LECT. IN MECHANICAL
GOVERNMENT POLYTECHNIC JAJPUR

EXPERIMENT NO: 01

AIM OF THE EXPERIMENT:-

To find out V.R, M.A and Efficiency of simple Screw Jack.

APPARATUS REQUIRED:-

Sl.No.	Name of the apparatus	Specification	Quantity
1	Screw Jack with its handle	2 ton	1 Set
2	Different slotted and conical weights	50-100 gms	8 set
3.	Nylon string	2 m	2 nos
4	Meter rod & pan		1 set

THEORY:

- Screw jack is a device for lifting heavy loads by applying a comparatively smaller effort at its handle.
- A screw jack consists of a threaded rod called screw rod or simply called screw.
- The screw has square thread, on its outer surface which fit into the inner threads of the jack .
- The load to be raised or lowered is placed on the head of the screw which is rotated by the application of an effort at the end of the lever for raising or lowering the load.

MATHEMATICAL FORMULA USED

Let L = Length of the effort arm, in m

p' = Pitch of the screw, mm

W = Load lifted by the screw jack, kg

P = Effort applied to lift the load at the end of the lever,

We know that,

- The distance moved by the effort in one revolution of the screw = $2\pi L$
- The distance moved by the load = p'

$$\text{➤ Velocity Ratio (V.R)} = \frac{\text{Distance moved by the effort}}{\text{Distance moved by the load}} = \frac{2\pi L}{p'}$$

$$\text{➤ Mechanical Advantage (M.A)} = \frac{\text{Load lifted}}{\text{Effort applied to lift the load}} = \frac{W}{P}$$

$$\text{➤ Efficiency } (\eta) = \frac{\text{M.A}}{\text{V.R}}$$

PROCEDURE


- Wrap one string round the circumference of the screw head and take it over a small pulley. Effort 'P₁' is tied to the free end of this string.
- Wrap another string round the circumference of the screw head in the same direction in which above string is wound and take it over the another small pulley.
- Place a load 'W' on the screw head.
- Suspend P₁ & P₂ to the free ends of both the strings coming over the two small pulleys. Then, P₁ & P₂ should be increased gradually.
- Note down "W ' & 'P' very carefully to determine mechanical advantages (M.A) $M.A. = \frac{W}{P}$, in this case P₁ + P₂ will be the value of "P"
- Repeat step 3 to 5 with increasing W & P i.e. P = P₁ + P₂ and take at least 3 readings and put the values in observation table.
- Find the distance moved by the effort in one revolution of screw = $2\pi L$
- Measure the pitch i.e. the distance between two consecutive threads.
- Find out the V.R. by putting the formula of $\frac{2\pi L}{p'}$
- At last find out the efficiency of screw jack by putting formula $(\eta) = \left(\frac{M.A}{V.R}\right)$

OBSERVATION TABLE:

Sl no	Load lifted (w)	Effort applied (P)	Distance moved by the effort(p')	Distance moved by the load	V.R	M.A	Efficiency (η)

CONCLUSION:

From this the above experiment, we successfully found the value of V.R, M.A and efficiency of simple screw jack.

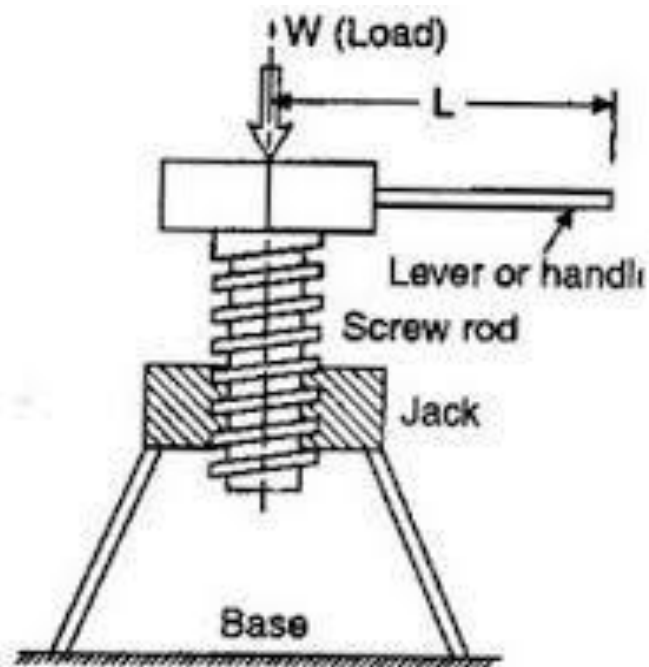

EXPERIMENT NO: 02

AIM OF THE EXPERIMENT:

Determination of Young's Modulus using Searl's Apparatus.

APPARATUS REQUIRED:

Sl.No.	Name of the apparatus	Specification	Quantity
1	Searl's apparatus		01
2	Vernier calliper	L.C =0.02mm	01
3.	Steel rule	L.C =0.5mm	01
4	Copper wire	D =0.001mm	01
5	Balancing weight	1Kg	10
6	Weight pan		01
7	Plier	Combination	01

THEORY:

STRESS:- It is defined as the ratio between the load and cross-sectional area of the given specimen.

Mathematically,

$$\text{Stress}(\sigma) = \text{load/area} = (p/a), \text{ in } N/m^2$$

Where Area(a) = $\pi.d^2/4$, where d=diameter of the wire, in m

STRAIN:- It is defined as the ratio between the change in the length to its original length of a given specimen.

Mathematically,

$$\text{Strain}(e) = \text{change in length/original length} = \delta l/l$$

Strain(e) has no unit.

YOUNGS MODULUS:- It is defined as the ratio between stress(σ) to strain(e).

Mathematically,

$$\text{Youngs' modulus}(E) = \text{stress/strain} = \sigma/e, \text{ in } N/m^2$$

TECHNICAL SPECIFICATION

Diameter of Copper wire (d) = ---- m

Original length of copper wire (l) = -----m

Area (a) = $\pi d^2/4$ = -----m²

PROCEDURE:-


- Take two copper wires.
- Hang the Searl's apparatus by the help of two copper wires of which one is control wire and another is testing wire.
- Now measure the diameter and length of the testing wire.
- Then set the weight pan in the testing side.
- Then give some load in the load pan. The wire will elongate.
- Now write down the load applied and the change in length in the observation table.
- Then gradually increase the loads and take at least three readings and calculate Young's Modulus by using formula.

OBSERVATION & CALCULATION TABLE

Sl. no	Load applied (p) In kg	Stress ($\sigma = p/a$) N/m ²	Change in length (δl) m	Strain ($e = \delta l/l$)	Young's Modulus ($E = \sigma/e$), N/m ²
01					
02					
03					

CONCLUSION:-

From the above experiment we have successfully determine the young's modulus by using the Searl's apparatus.

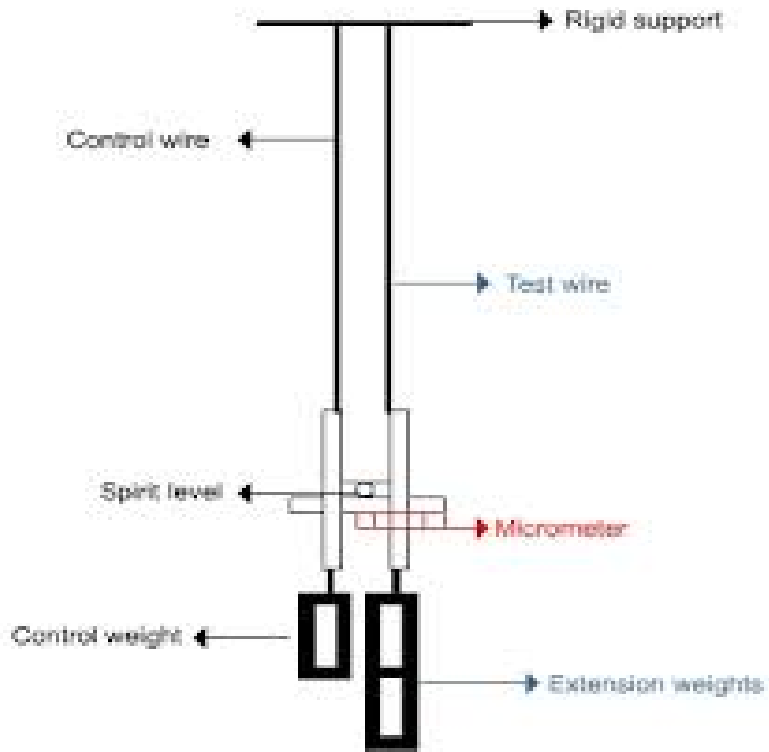

Searl's apparatus

EXPERIMENT NO: 03

AIM OF THE EXPERIMENT:-

Study of Universal Testing Machine(UTM) and determination of tensile stress and young's modulus of M.S specification.

APPARATUS REQUIRED:-

Sl.no	Name of the apparatus	Specification	Quantity
01	Universal testing machine	200KN	01
02	Mild steel specimen	L=..... D=.....	01
03	Vernier calliper	Least count=0.02mm	01
04	Steel rule	L=300mm	01

THEORY:-

- The result obtained by the tensile test are widely used in design of material for structures and others purposes.
- In this test the specimen pulled out at a constant rate by gradually increasing the axial pull till the rupture takes place.
- The tensile test for a ductile material is generally carried out with the help of UTM.
- The machine has two units ,one is control unit and another is release valve.
- Control unit is used for controlling the load applied and release valve is used for releasing the hydraulic pressure.
- The tensile test of a material is generally performed to determine:-Proportional limit,Elastic limit,Yield point,Ultimate point,Fracture point or breaking point
- **Proportional Limit**
We see from the above diagram that from point 'o' to 'A' is a straight line which represents that the stress is proportional to strain. Beyond point 'A', The curve is slightly deviated from the straight line. It is then obeys the hook's law hold up to 'A' and is known as proportional limit.
- **Elastic Limit**
It may noted that even if the load is increased beyond point 'A' up to point 'B' the material will regain its shape and size .The point 'B' is known as elastic limit.
- **Yield Point**
If the material is stretched beyond point 'B' the elastic stress will be reached i.e on the removal of the load ,the material will not be able recover its original shape and size .The point 'C' and 'D' are called upper yield and lower yield point respectively .The stress corresponding to yield point is known as yield stress.

➤ **Ultimate Point**

At 'E' the specimen undergoes the regain if some strain and higher values stress are required for higher stress and then those between 'A' and 'E'. The stress goes on increasing till point 'F' is reached. At 'E' the stress which attains maximum values is known as ultimate tensile stress.

➤ **Breaking Point**

After the specimen has reached to the ultimate stress the neck is formed which decreases the cross sectional area of the specimen. The stress is therefore reduced until the specimen breaks itself at point 'F'. The stress corresponding to point 'G' is known as breaking stress.

PROCEDURE-

➤ **Mathematical Formula Used**

Stress (σ) = load/cross sectional area = P/a , N/m^2

a = area of the specimen = $(\pi/4) \times d^2$, m^2

d = diameter of the specimen, m

Strain(e) = change in length/original length = $\delta L/L$, It is unit less.

Young's modulus(E) = stress/strain = σ/e , N/m^2

TECHNICAL SPECIFICATION

Diameter of the Specimen(d) = m .

Area of specimen (a) = $\pi \cdot d^2/4$ = m^2


Original Length of the Specimen(L) = m .

OBSERVATION & CALCULATION TABLE

Sl no.	Load applied(P)	Change in length(δl)	Stress(σ)= P/a	Strain(e)= $\delta l/L$	Young's Modulus $E=\sigma/e$

CONCLUSION:-

From the above experiment we have successfully determine the young's modulus of mild steel specimen by using Universal Testing Machine (UTM).

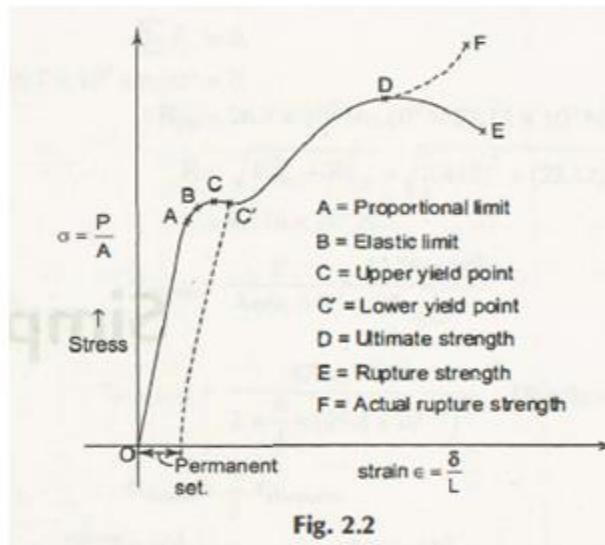

Conditions for $\epsilon = \frac{\delta}{L}$ to be constant.



EXPERIMENT NO-04

AIM OF THE EXPERIMENT:-

Study of pressure measuring devices such as piezometer & simple manometer.

APPARATUS REQUIRED:-



Sl.no	Name of the apparatus	Specification	Quantity
01	Piezometer	Simple	01
02	Manometer	U-tube	01

THEORY:-

1-Study of Piezometer

- A piezometer is either a device used to measure liquid in a system by measuring the height to which a column of the liquid rises against gravity.
- Piezometer tube is the simple form of pressure measuring instrument by which pressure head of a liquid contained in a vessel can be directly measured.
- Intensity of pressure of the liquid in the vessel can then be calculated from the pressure head(h).
- Piezometer consists of a glass tube which is open at both ends.
- One end is connected to the vessel containing a liquid whose pressure head is required to be found out.
- The other end of the glass tube is exposed to the atmosphere.

Let h =vertical height through which the liquid rises in the piezometer tube .
Then the pressure $P=\rho gh$

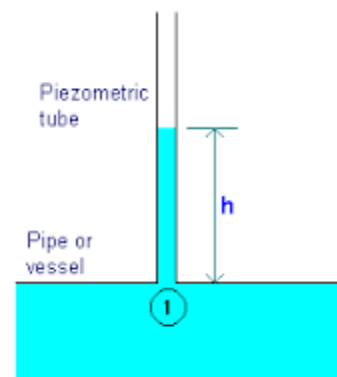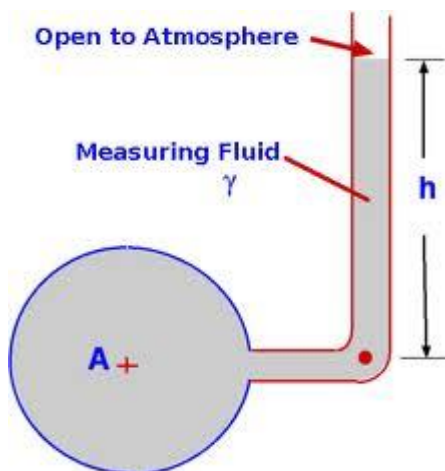

2-Study Of Manometer

- A Manometer is slightly improved form of a piezometer tube for measuring high as well as negative pressure.
- A simple manometer, in its simplest form, consists of a tube bent in U-shape, one end of which is connected to the vessel containing the liquid whose intensity of pressure is to be measured and other end is open to the atmosphere.
- The liquid used in the bent tube is generally Mercury (Hg) which is 13.6 times heavier than water.
- The pressure of the liquid containing in the vessel will force the manometric liquid in the left hand vertical limb of the U-tube downward and will force the manometric liquid to rise up in the right hand vertical limb of the U-tube through equal distance (fig-1). This will happen when the pressure in the vessel is greater than atmospheric pressure.
- If pressure of liquid in the vessel is less than atmospheric pressure ,the deflection of manometric liquid will be observed in the left hand limb of the u-tube(fig-2)

CONCLUSION:-

From the above experiment we have successfully studied about piezometer & simple manometer.

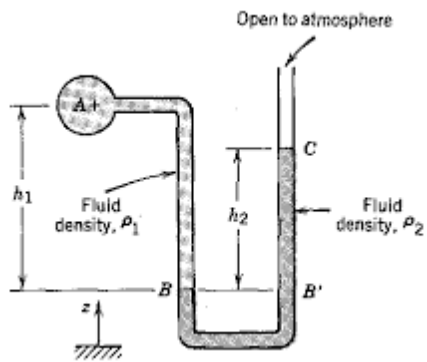


Fig-1

Gauge Pressure Measurement
using U tube manometer

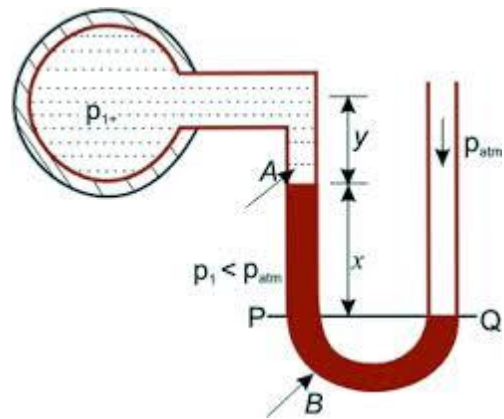


fig-2

Vacuum Pressure Measurement
using U-tube manometer

EXPERIMENT NO-05

AIM OF THE EXPERIMENT:-

Study of Bernoulli's Theorem.

APPARATUS REQUIRED:-

Sl.no	Name of the apparatus	Specification	Quantity
01	Bernoulli's Apparatus with venturimeter	Test Rig	01
02	Steel rule	L=30cm	01

THEORY:-

- Bernoulli's theorem states that "For a steady, continuous, incompressible, & non-viscous fluid flow, the total energy or total head remains constant at all the sections along the fluid flow provided there is no loss or addition of energy".

i.e. $P/\rho g + V^2/2g + Z = \text{Total head (H)} = \text{constant}$


Where, $P/g = \text{Pressure head in m}$

$V^2/2g = \text{Velocity or kinetic head in m (where Velocity of water} = Q/A, \text{ m/s)}$

$Z = \text{Potential head (Height above some assumed datum level i.e. } Z=0)$

- Bernoulli's equation is based on Euler's equation of motion. It is applicable to flow of fluid through pipe and channel. It is required to be modified if the flow is compressible & unsteady.

Concept Structure:-

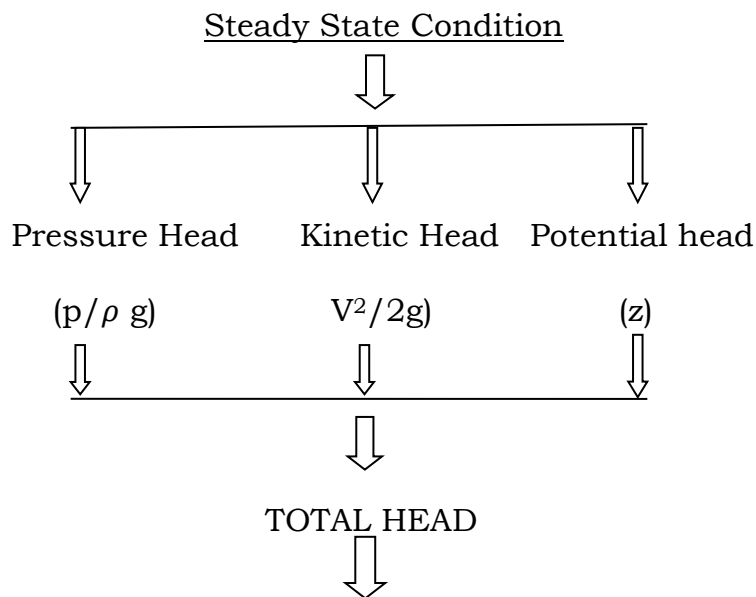

CONSTANT

CONCLUSION:-

Hence we have successfully studied about Bernoulli's theorem.

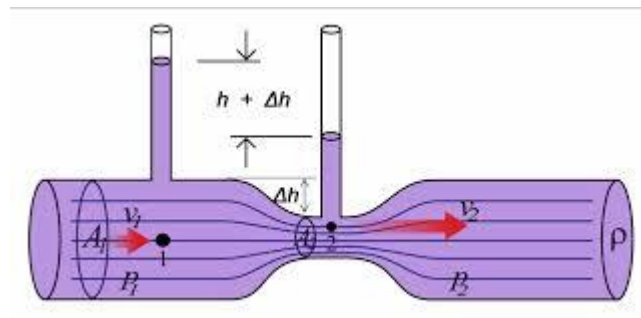
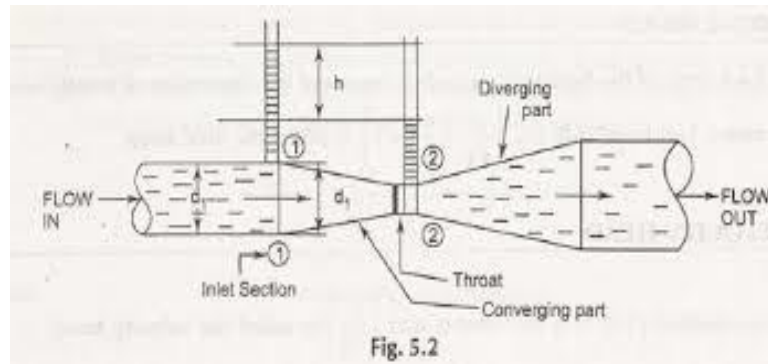


Fig:-Venturimeters used in Bernoulli's Theorem

EXPERIMENT NO-06


AIM OF THE EXPERIMENT:-

Verification of Bernoulli's theorem.

APPARATUS REQUIRED:-

Sl.No	Name of the Apparatus	Specification	Quantity
01	Bernoulli's Apparatus test rig		01
02	Stop watch	Digital type	01
03	Steel rule	L=30cm	01

THEORY:-

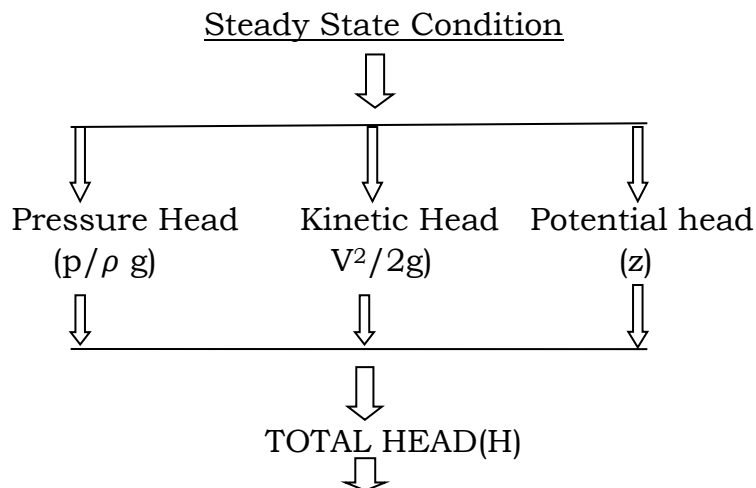

CONSTANT

$$\text{Total Head}(H) = P/\rho g + V^2/2g + Z = \text{constant}$$

Where, P/g = Pressure head in m

$V^2/2g$ = Velocity or kinetic head in m

Z = Potential head in m

PROCEDURE:-

- Measure the area of conduit at various gauge points.
- Open the supply valve and adjust the flow so that the water level in the inlet tank remains constant.
- Measure the height of water level (above the arbitrarily selected plane) in different piezometric tubes with the help of steel rule.
- Measure the discharge of the conduit with the help of measuring tank.
- Note the time duration by stop watch from beginning of initial flow to end of the flow
- Repeat the steps for two more readings.

TECHNICAL SPECIFICATION:-

- Length of the discharge tank(l)= 40cm =0.4m
- Breadth of the discharge tank(b) = 30cm=0.3m
- Area of the measuring tank (a) = l x b =0.4 x 0.3= 0.12 m²

OBSERVATIONS:-

- Depth of water collected in discharge tank, h =cm=.....m
- Volume of water collected in the tank, q = a x h =..... m³
- Time of collection (t) =.....s

CALCULATION TABLE:-

Tube no	Area of flow of tubes, A in (m ²)	Discharge , Q = q/t in (m ³ /s)	Velocity of flow V in m/s V= Q/A	Velocity Head , V ² /2g in ,m	Pressure Head , P/ρg in ,m	Datum Head Z,	Total Head(H)= P/ρg+ V ² /2g +Z (m) (v +vi + vii)	Remark
(i)	(ii)	(iii)	(iv)	(v)	(vi)	(vii)	(viii)	(ix)
01								
02								
03								
04								
05								
06								
07								
08								
09								
10								

CONCLUSION

Hence we have successfully verified Bernoulli's Theorem and we see that the total head in all the sections of the Bernoulli's apparatus test rig is constant. The slight variation (if any) is due to losses.



(fig:-Bernoulli's apparatus)

EXPERIMENT NO-07

AIM OF THE EXPERIMENT:-

Model study of, Francis Turbine, Kaplan Turbine, Pelton wheel Turbine and Centrifugal Pump.

APPARATUS REQUIRED:-

Sl.No	Name of the Apparatus	Specification	Quantity
01	Centrifugal pump	Model	01
02	Francis turbine	Model	01
03	Kaplan Turbine	Model	01
04	Pelton Turbine	Model	01

THEORY:-

STUDY OF TURBINES:-

The hydraulic machine which converts the hydraulic energy into mechanical energy is called Turbines. Turbines are 3-types:- Pelton Wheel Turbine, Francis Turbine & Kaplan Turbine.

1. Pelton Turbine:-

- It is a tangential flow impulse Turbine which is used for high head and low discharge.
- Main parts of this turbine are:- Nozzle with and guide mechanism, Runner with buckets, casing .
- Working principle:- The jet of water from the nozzle strikes at the center of the buckets with a very high velocity and leaves the buckets with a low velocity and produces impacts on buckets. Due to the impacts, turning moment acts on the runner which now rotates at high speed.

2. Francis Turbine:-

- Francis turbine is an inward flow reaction turbine, in which water flows radially from outwards towards the axis of rotation of the turbine shaft.
- Main parts of this turbine are:- casing, guide mechanism, runners, draft tube.
- Working principle:- water from the reservoir is led to the turbine through the penstock then enters into the Casing with guide vanes and runner. Flowing through the guide vanes, water radially strikes the runner blades and causes the runner to rotate. Then the water flows to the tailrace through draft tube.

3. Kaplan Turbine:-

- Kaplan turbine is a vertical axial flow reaction turbine .
- Here water flows into the "scroll casing" from "pen stock" and from there water flows over the guide blades into the runner blades.
- Water exerts force to the runner blades due to pressure difference between inlet and outlet side of the runner.
- This force causes the turbine to rotate about a vertical axis.
- Ultimately water leaves the runner through a draft tube into the tail race.

STUDY OF PUMPS:-

The hydraulic machine which converts the mechanical energy into hydraulic energy is called pumps. Pumps are 2-types:-Centrifugal pump & Reciprocating pump.

Centrifugal Pump:-

- If the mechanical energy is converted into pressure energy by means of centrifugal force acting on the fluid, the hydraulic machine is called centrifugal pump.
- The centrifugal pump works on the principle of vortex flow which means that when a certain mass of liquid is rotated by an external torque, the rise in pressure head of the rotating liquid takes place.
- Main parts of this turbine are:-Impeller, casing & suction pipe with foot valve and a strainer.
 - **Impeller**:-It is the rotating part of the centrifugal pump, consists of a series of backward curved vanes. It is mounted on a shaft which is connected to the shaft of an electric motor.
 - **Casing**:-It is an airtight passage surrounding the impeller and is designed in such a way that the K.E of the water discharge at the outlet of the impeller is converted into pressure energy before the water leaves the casing.
 - **Suction pipe with foot valve**:- A pipe whose one end is connected to the inlet of the pump and other end dips into water in a sump is known as suction pipe. A foot valve which is a non-returning valve is fitted at the lower end of the suction pipe. The foot valve opens only in the upward direction. A strainer is also fitted at the lower end of the suction pipe.

CONCLUSION

Hence we have successfully studied about different types of turbines and pumps.

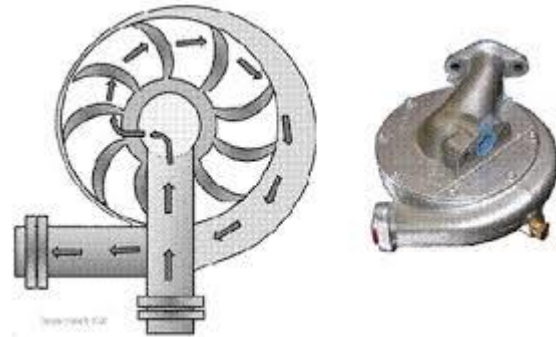
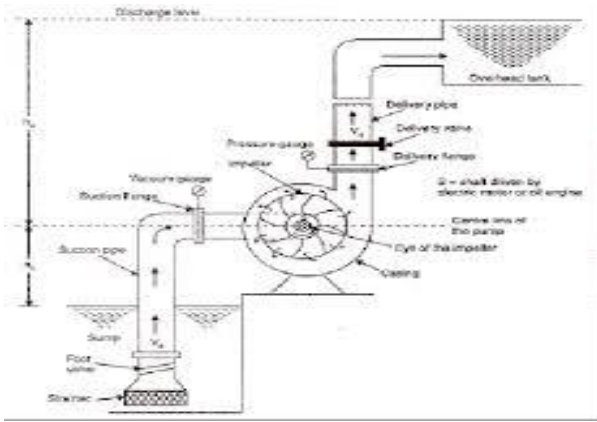


Fig:-Centrifugal pump

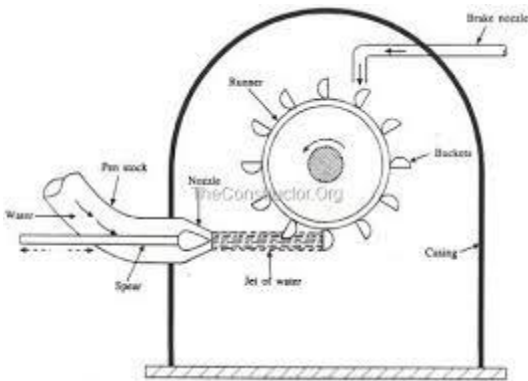


fig:-pelton wheel turbine



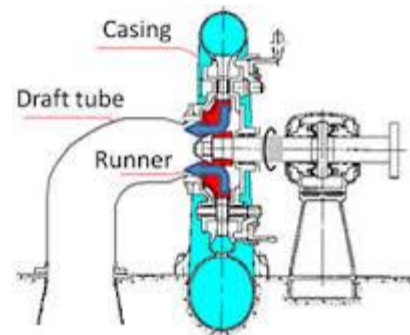


fig:-francis Turbine

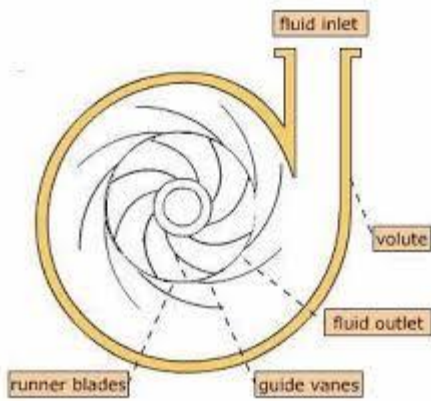

Francis turbine

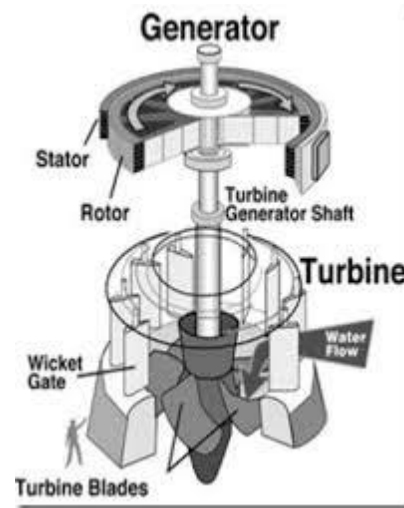

Kaplan turbine

EXPERIMENT NO-08

AIM OF THE EXPERIMENT:-

Study of Cochran Boiler

APPARATUS REQUIRED:-

Sl.No	Name of the Apparatus	Specification	Quantity
01	Cochran Boiler	Model	01

THEORY:-

- It is one of the best type of vertical tubular boiler and has a no of horizontal fire tube .
- Dimension of Cochran Boiler:-
 - Shell dimation-2.75mHeight-5.79m
 - Working pressure-6.5 barSteam capacity-3500 kg/hr
 - Heating surface-120m²Efficiency-70-75% (depending on fuel used)
- Cochran Boiler consists of a cylindrical shell with a dome shaped top where the space is provided for steam.
- The furnace is one piece construction and is seamless.
- Its crown has a hemi-spherical shape and thus provides maximum volume of space.
- The fuel burnt on the grate and ash is collected and disposed in form of ash pit.
- The gases of combustion produced by the burning of fuel enter the combustion chamber through the fuel tube and strikes against fire brick lining.
- Then passes through number of horizontal tubes, being surrounded by water.
- Then, the gases escape to the atmosphere through smoke box and chimney.
- Due to heat of combustion gases the steam will produced & move towards top to enter into nozzle & turbine.
- The various boiler mountings are:-
 - 1-Water level gauge,2-safety valve,3-steam stop valve,4-blow off cock,5-man hole ,6-pressure gauge.

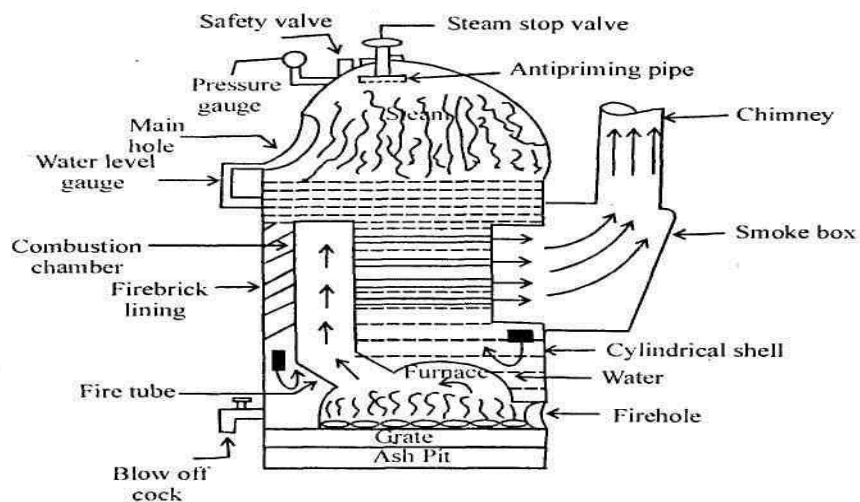


Fig. Cochran Boiler

EXPERIMENT NO-09

AIM OF THE EXPERIMENT:-

Study and demonstration of steam engine.

APPARATUS REQUIRED:-

Sl.No	Name of the Apparatus	Specification	Quantity
01	Simple steam engine	Model	01

THEORY:-

- In all steam engines, the steam is used as the working substance .These engines operate on the principle of first law of thermodynamics.
- In steam engines ,the steam is converted into mechanical work by the reciprocating motion of piston.
- The steam engines are classified as follows:-
 1. According to the no. of working stroke
 - (a)Single acting steam engine.
 - (b)Double acting steam engine.
 2. According to the position of the cylinder.
 - (a) Horizontal steam engine
 - (b) Vertical steam engine.
 3. According to the speed of the crankshaft.
 - (A) Slow speed steam engine ($N < 100$ rpm)
 - (b) Medium speed steam engine ($100 < N < 250$)
 - (c)High speed steam engine ($N > 250$)
- Important parts of steam engine are:-
 1. Frame:-It supports all stationary and moving parts and holds them in proper position. It is made of up Cast Iron.
 2. Cylinder:-It is a hollow cylindrical vessel made of up cast iron in which piston reciprocates.
 3. Steam Chest:-It supplies steam to the cylinder with the movement of D-slide valve.
 4. D-slide valve:-It moves in the steam chest with S.H.M and exhaust steam from the cylinder at proper movement.
 5. Inlet and exhaust ports:-These are the holes provided in the body of the cylinder for the movement of steam.
 6. Piston:-It is acylindrical disc,moving to and fro,in the cylinder because of the steam pressure. Its function is to convert heat energy of the steam into mechanical work.
 7. Piston Rod:-It is a circular rod, which is connected to the piston on one side and cross head to the other.Its main function to transfer motion from the piston to the cross-head.

8. Cross Head:-It is a link between the piston rod and connecting rod. Its function is to guide motion of the piston rod and to prevent it from bending.
9. Connecting Rod:-It connects both cross head and the crank, converts reciprocating motion of the piston into rotary motion of crank.
10. Crank shaft:-It is the main shaft of the engine having a crank.
11. Eccentric:-It is generally made of cast iron and is fitted to the crank shaft.Its function is to provide reciprocating motion to the slide valve.
12. Eccentric rod and valve rod:-It is made of up forged steel, connects eccentric with valve rod.Its function is to convert rotary motion of the crank shaft into to and fro motion of the valve rod.
13. Flywheel:-It is mounted on the crank shaft which prevents the fluctuation of engine. Made of Cast iron.

WORKING PRINCIPLE:-

- The superheated steam at a high pressure from the boiler is led into the steam chest.
- After that the steam makes its way into the cylinder through any of the ports 'a' or 'b' depending upon the position of the D-slide valve.
- When port 'a' is open, the steam rushes to the left side of the piston and forces it to the right.
- At this stage, the slide valve covers the exhaust port and the other steam port 'b'.
- Since the pressure of steam is greater on the left side than that on right side, the piston moves to the right.
- When the piston reaches near the end of the cylinder, it closes the steam port 'a' and exhausts port.
- The steam port 'b' is now open, and the steam rushes to the right side of the piston.
- This forces the piston to the left and at the same time the exhaust steam goes out through the exhaust pipe, and thus completes the cycle of operation.
- The same process is repeated in other cycles of operation, and as such the engine works.

CONCLUSION

- Hence we have successfully studied about steam engine.

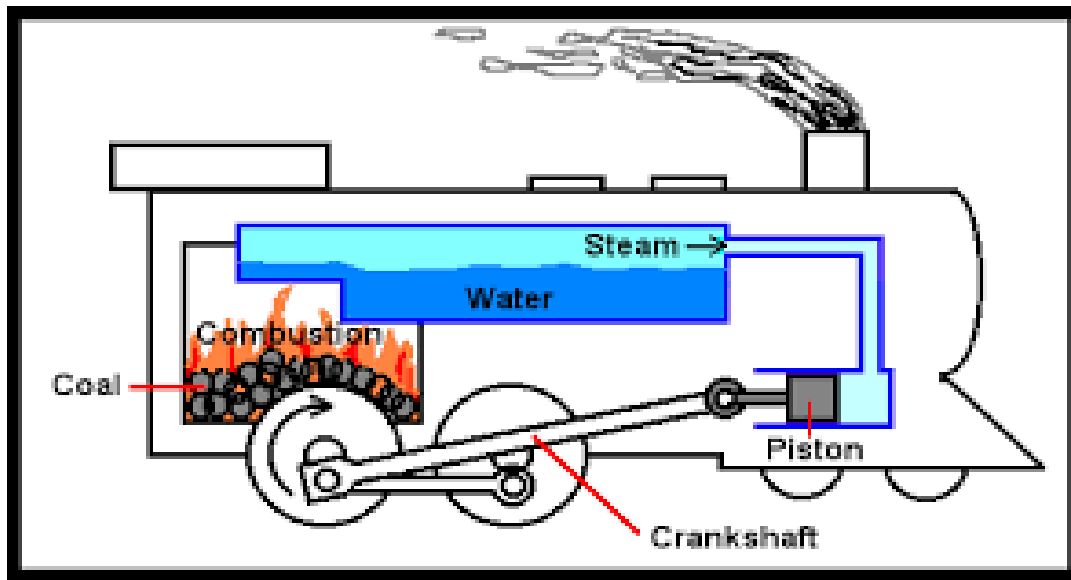
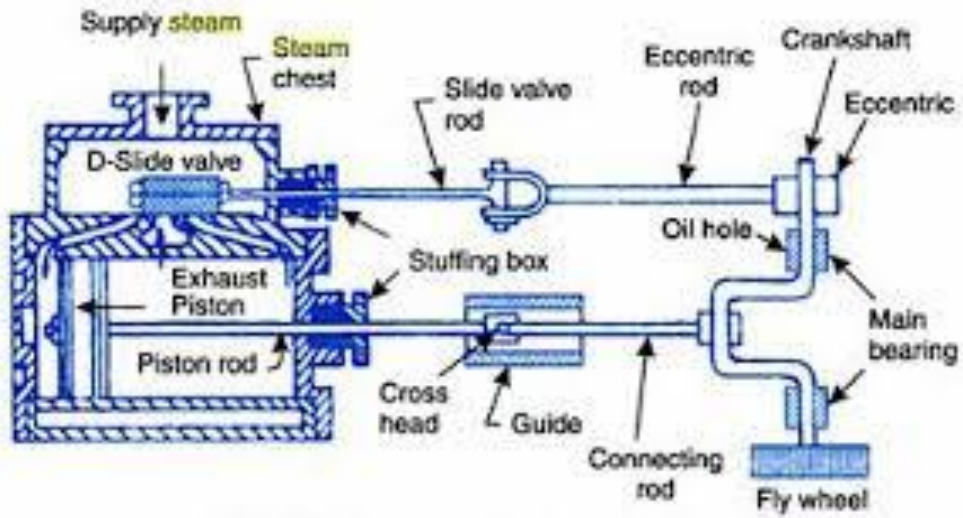


Fig- steam engine.

EXPERIMENT NO-10

AIM OF THE EXPERIMENT:-

Study and demonstration of Diesel engine

APPARATUS REQUIRED:-

Sl.no	Name of the apparatus	specification	Quantity
01	2-stroke diesel engine	Model	01
02	4-stroke diesel engine	Model	01

THEORY:-

2-STROKE DIESEL ENGINE:-

A two stroke cycle diesel engine also has one working stroke after one revolution of the crank shaft. All the four stages of a two stroke cycle diesel engine are described below:

1. Suction Stage:-

- In this stage, the piston while going down towards BDC uncovers the transfer port and the exhaust port.
- The fresh air flows into the engine cylinder from the crank case.

2. Compression Stage:-

- In this stage, the piston while moving up, first covers the transfer port and then exhausts post.
- After that the air is compressed as the piston moves upward.
- In this stage, the inlet port opens and the fresh air enters in to the crank case.

3. Expansion Stage:-

- Shortly before the piston reaches the TDC (during compression stroke), fuel is injected in the form of very fine spray into the engine cylinder through the nozzle known as fuel injection valve.
- At this moment, temperature of the compressed air is sufficiently high to ignite the fuel. It suddenly increases the pressure and temperature of the products of combustion.
- Due to increased in pressure, the piston is pushed with a great force. The hot burnt gases expand due to high speed of the piston.
- During the expansion, some of the heat energy produced is transformed into mechanical work.

4. Exhaust Stage:-

- In this stage, the exhaust port is opened and the piston moves downwards.
- The products of combustion from the engine cylinder are exhausted through the exhaust port into the atmosphere.
- This completes the cycle ,and the engine cylinder is ready to suck the air again.

4-STROKE DIESEL ENGINE:-

It is also known compression ignition engine.Because the ignition takes place due to the heat produced in the engine cylinder at the end of compression stroke.The four strokes of the diesel engine are described below:

1. Suction Stroke:-

- In this stroke,the inlet valve opens and the pure air is sucked into the cylinder as the piston moves downwards from TDC.
- It continues till the piston reaches atBDC .

2. Compression Stroke:-

- In this stroke,both the valves are closed and the air is compressed as the piston moves upwards from BDC to TDC.
- As result of compression,presure and temperature of the air increases considerably.
- This completes the revolution of the crank shaft.

3.Expansion Stroke:-

- Shortly before the piston reaches the TDC,fuel is injected in the form of very fine spray in to the engine cylinder through the nozzle known as fuel injector.
- At this moment,temperature of the compressed air is sufficiently high to ignite the fuel. This ignition suddenly increases the pressure and temperature of product of combustion.
- Due to increased pressure,the piston is pushed down with a great force.The hot burnt gases expand due to high speed of the piston.
- During the expansion,some of heat energy is transformed into mechanical work.

4. Exhaust Stroke:-

- In this stroke the exhaust valve is open as the piston moves from BDC to TDC.
- This movement of the piston pushes out the product of combustion from the engine cylinder through the exhaust valve into the atmosphere.
- This completes the cycle and the engine cylinder is ready to suck the fresh air again.

CONCLUSION:-

From the above experiment we have successfully studied about the 2-stroke and 4-stroke diesel engine.

4-stroke Compression-ignition (Diesel) Engine Cycle






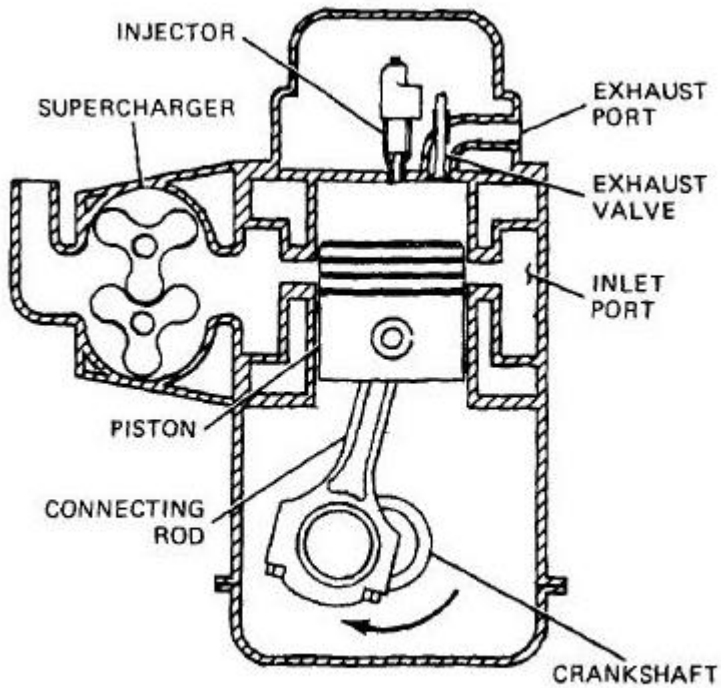


Figure 2-21. The Two Stroke Cycle
Diesel Engine

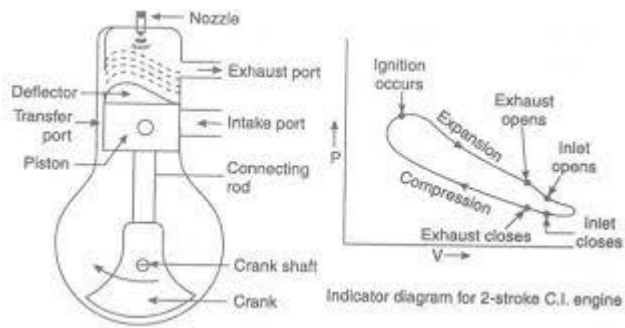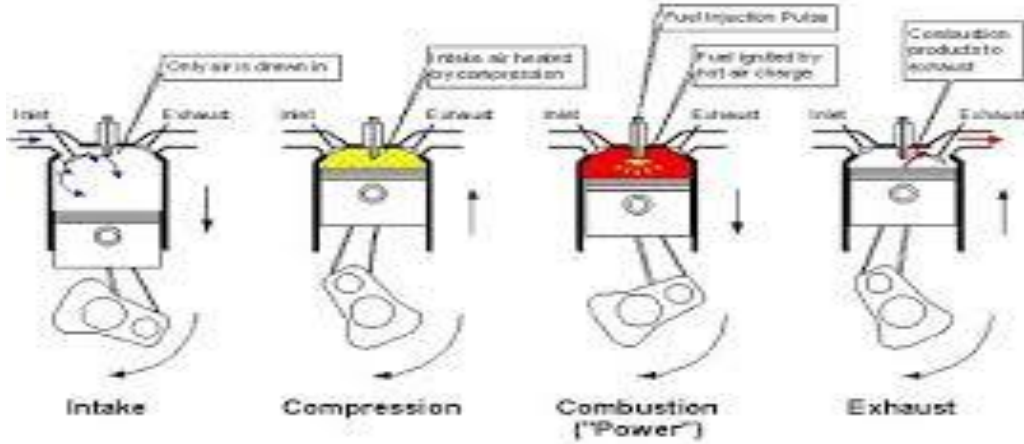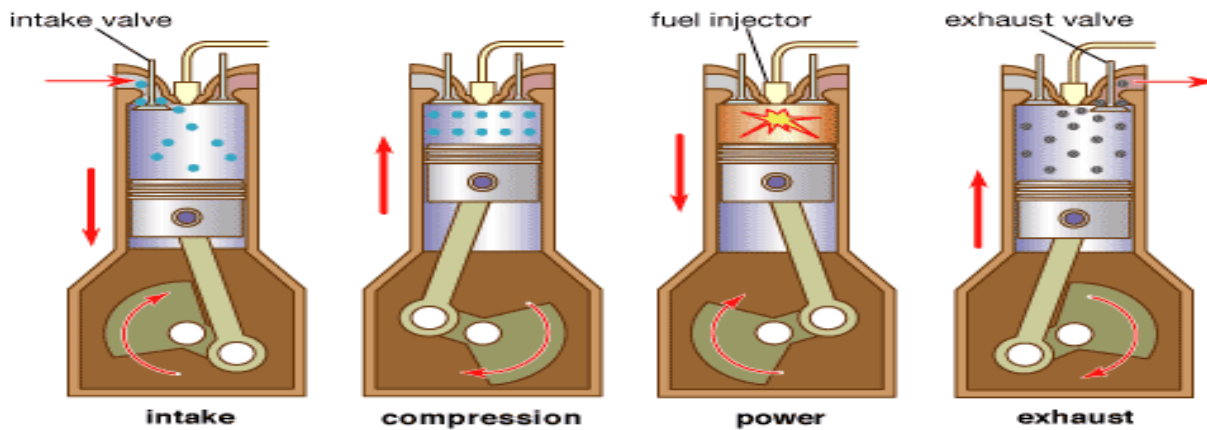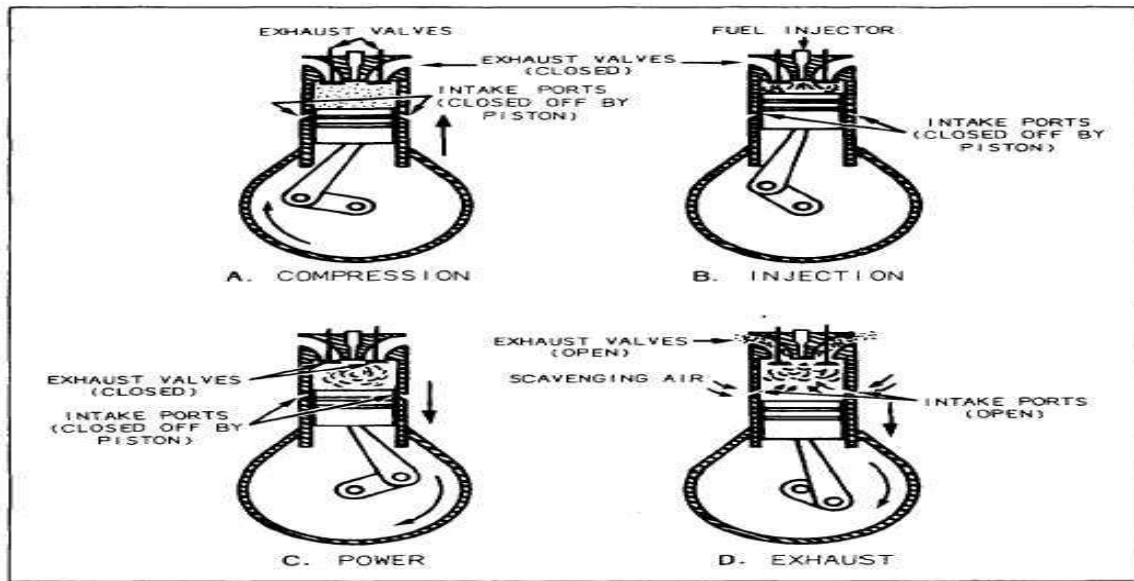

© 2007 Encyclopædia Britannica, Inc.

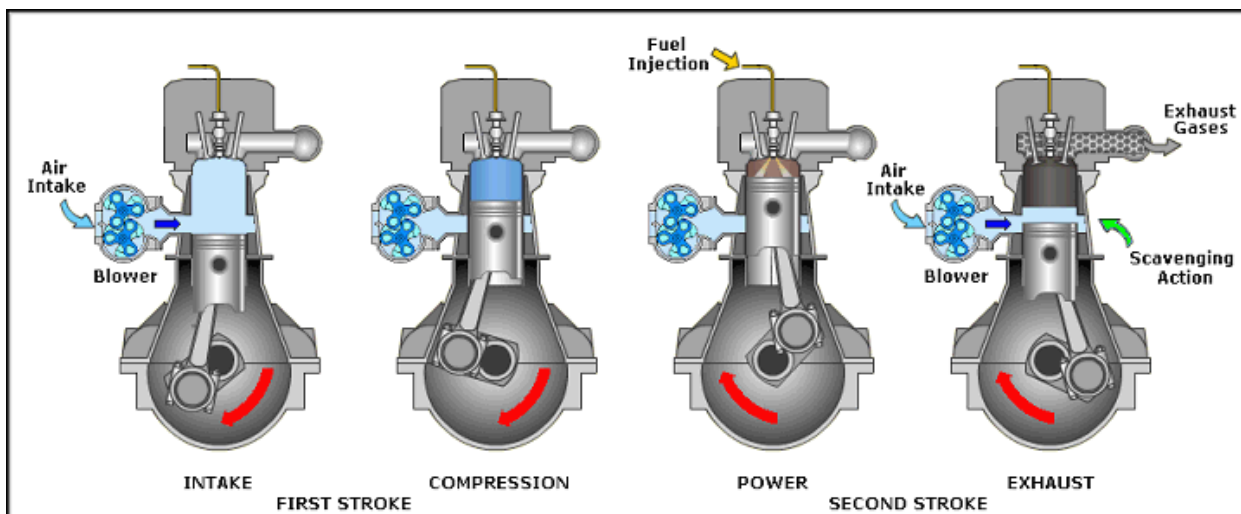

EXPERIMENT NO-11

AIM OF THE EXPERIMENT:-

Study and demonstration of Petrol Engine.

APPARATUS REQUIRED:-

Sl.no	Name of the apparatus	Specification	Quantity
01	2-stroke Petrol Engine	Model	1
02	4-stroke Petrol Engine	Model	1

THEORY:-

2-STROKE PETROL ENGINE:-

In a 2-stroke petrol engine the four stages i.e suction,compression,expansion,and exhaust takes place during two strokes of the piston.It means that there is one working stroke after every revolution of the crank shaft.A two stroke engine has ports instead of valves .Four stages of a two stroke petrol engine are described below:

1. Suction Stage:-

- In this stage, the piston,while going down towards BDC,uncovers both the transfer port and the exhaust port.
- The fresh fuel-air mixture flows into the engine cylinder from the crank case.

2. Compression Stage:-

- In this stage,the piston,while moving up,first covers the transfer port .
- After that the fuel is compressed as the piston moves upwards from BDC to TDC.
- In this stage,the inlet port opens and fresh fuel-air mixture enters into the crank case.

3. Expansion Stage:-

- Shortly before the piston reaches the TDC (during compression stroke), their fuel mixture is ignited with the help of a spark plug.
- It suddenly increases the pressure and temperature of the product of combustion. But the volume practically remains constant.
- Due to rise in the pressure, the piston is pushed downwards with a great force.
- The hot burnt gases expand due to high speed of the piston. During this expansion, some of the heat energy produced is transformed into mechanical work.

4. Exhaust Stage:-

- In this stage, the exhaust port is opened as the piston moves downwards.

- The products of combustion, from the engine cylinder are exhausted through the exhaust port into the atmosphere.
- This completes the cycle and the engine cylinder is ready to suck the air fuel mixture again.

4- STROKE PETROL ENGINE:-

It requires four strokes of the piston to complete one cycle of operation in the engine cylinder. The four strokes of a petrol engine are described below:

1. Suction Stroke:-

- In this stroke, the inlet valve opens and the air fuel mixture is sucked into the cylinder as the piston moves downward from TDC.
- It continues till the piston reaches at BDC.

2. Compression Stroke:-

- In this stroke, both the inlet and exhaust valves are closed and the charge is compressed as the piston moves upwards from BDC to TDC.
- As a result of compression, the pressure and temperature of the air fuel mixture increases considerably.
- This completes one revolution of the crank shaft.

3. Expansion Stroke:-



- Shortly before the piston reaches TDC (during compression stroke), the air fuel mixture is ignited with the help of a spark plug.
- It suddenly increases the pressure and temperature of the products of combustion but the volume practically remains constant.
- Due to the rise in pressure, the piston is pushed down with a great force. The hot burnt gases expand due to high speed of the piston.
- During this expansion, some of the heat energy produced is transformed into mechanical work.

4. Exhaust Stroke:-


- In this stroke, the exhaust valve is open as piston moves from BDC to TDC.
- This movement of the piston pushes out the products of combustion, from the engine cylinder and are exhausted through the exhaust valve into the atmosphere.
- This completes the cycle, and the engine cylinder is ready to suck the charge again.

CONCLUSION:-


From the above experiment we have successfully studied about 2-stroke and 4-stroke Petrol Engine.

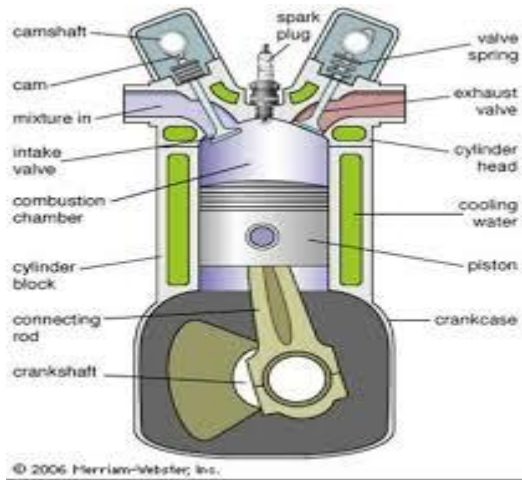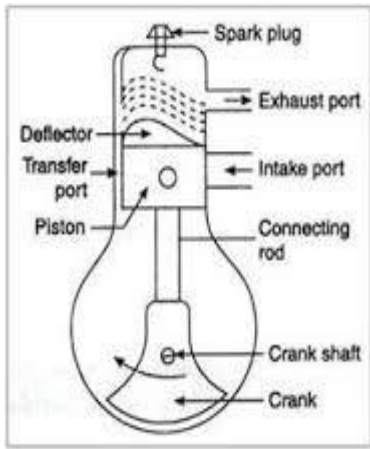


© 2006 Merriam-Webster, Inc.

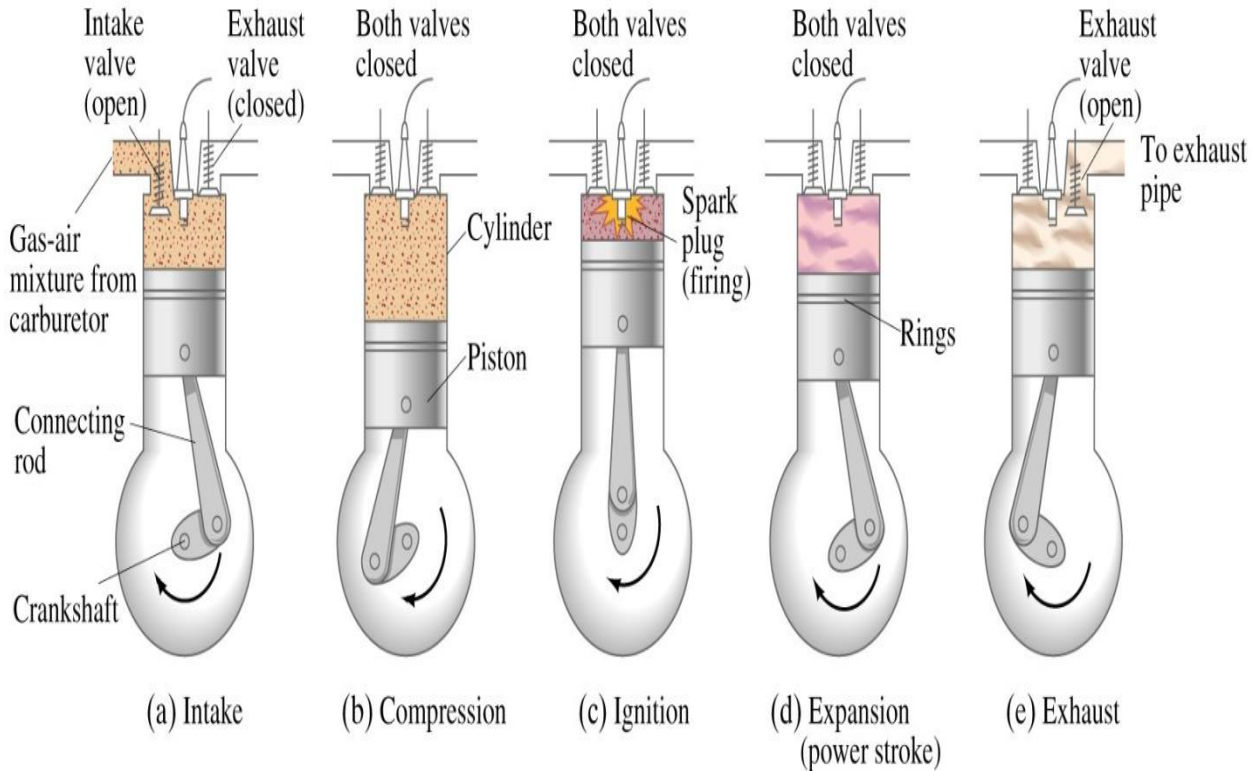


Copyright © 2005 Pearson Prentice Hall, Inc.

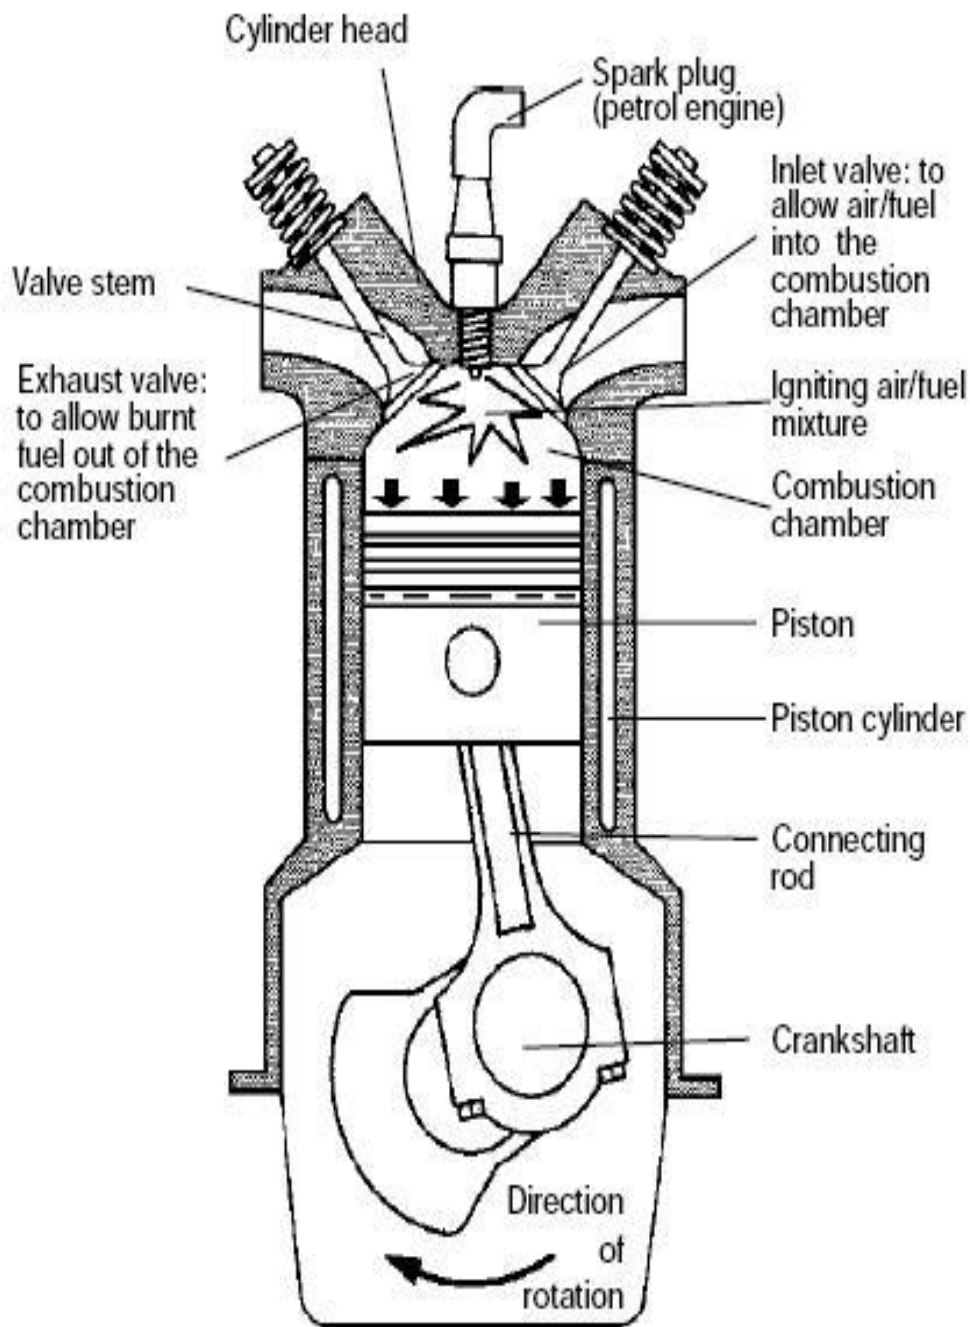


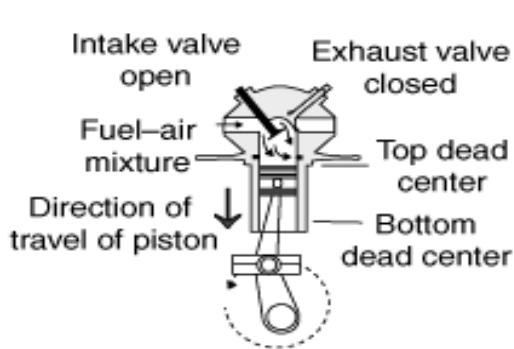


Induction stroke.

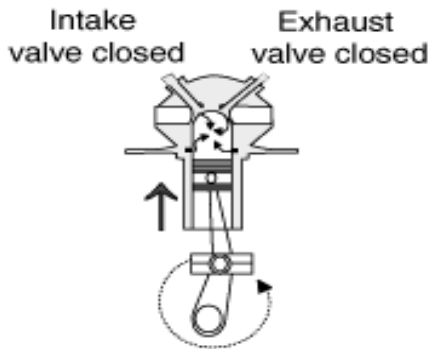

Compression stroke.

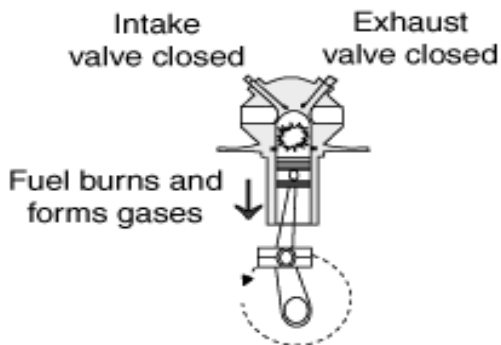


Power stroke.

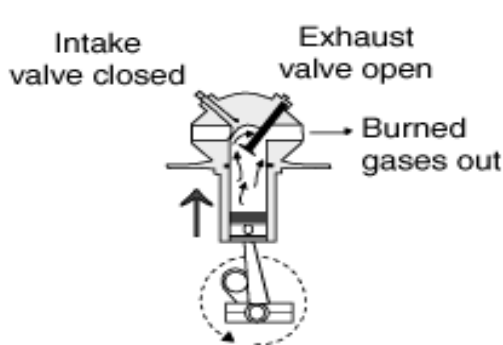


Exhaust stroke.

The 2 Stroke Cycle

Stroke 1)

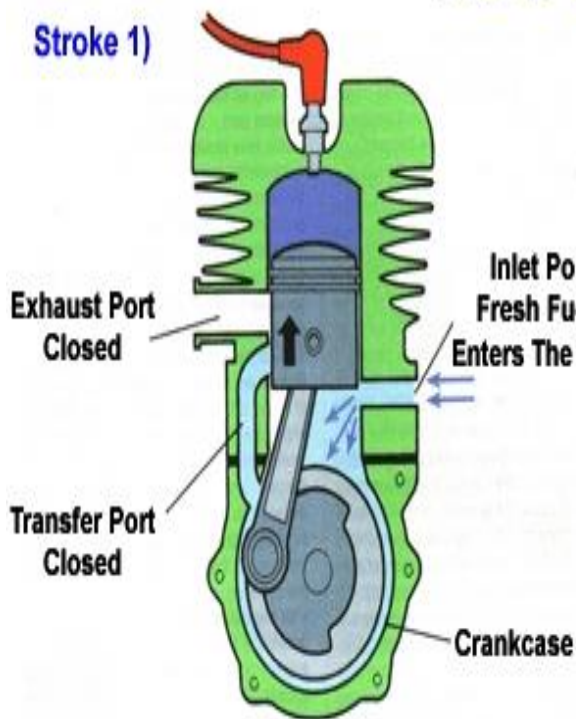

Stroke 2)

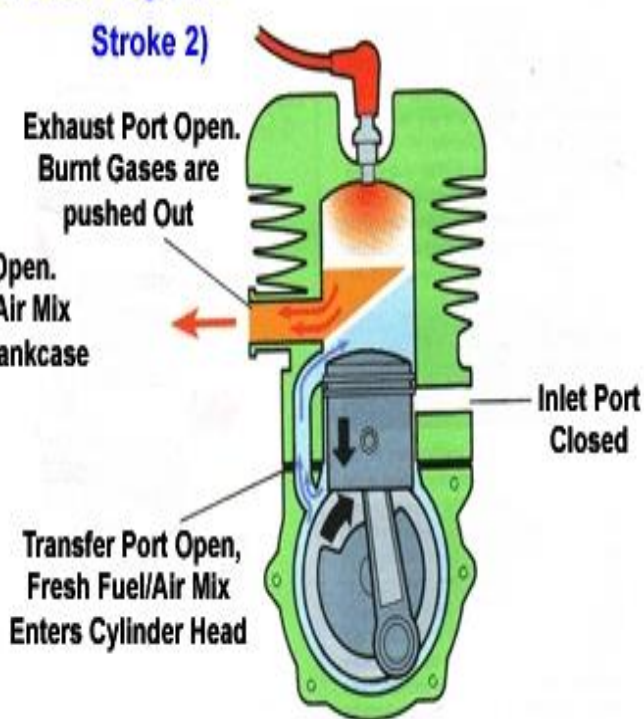

Induction &
Compression

Ignition &
Exhaust